



SUNWARD·PSR
山河普石勒

SP1560MSTD

履带式筛分站(柴电两用)

CRAWLER SCREENING PLANT (DIESEL-ELECTRIC)



产品特点 Product Advantages

- ◆ 外接电、自主发电两种动力方式，节能、便捷。

Two power methods, including external and internal power supply, saving energy and convenient.

- ◆ 配置篦条筛上料系统，能独立工作，保证上料稳定性。

Equipped with grizzly feeder, which can work independently, ensuring feeding stability.

- ◆ 自主研发的智能、自动化电气控制系统，包含自我诊断、自动报警，保障设备安全可靠。

Self-developed automatic electrical control system with self-diagnosis, safety interlocking and automatic alarm functions, ensuring safe and reliable performance.

- ◆ 底盘通用性更强，可搭载市电或柴电任意一种动力装置。

The chassis is more versatile and can be equipped with any power unit of commercial power or diesel power.

- ◆ 自主研发筛分主机，结构更强、能耗更低、筛透性更高，检修调节更方便。

Self-developed screening machine with stronger structure, lower energy consumption, high screening permeability, also easy for inspection and maintenance.

- ◆ 动力发动机采用国IV标准，排放更环保。

Equipped with engine of China IV emission standard, more eco-friendly.


SP1560MSTD履带式筛分站 (柴电两用)

CRAWLER SCREENING PLANT (DIESEL-ELECTRIC)



扫一扫视频号获取更多资讯

项目 Item	名称 Description	参数 Parameter
整机 Overall Unit	工作总功率 Total Working Power	87 kW
	发电机组功率 Generator Power	120 kW
	整机重量 Total Weight	48 t
	动力方式 Drive Mode	柴-电两用 Diesel-electric
	处理能力 Processing Capacity	150-350 t/h
	工作尺寸 Working Dimension (L×W×H)	18950×18630×6820 mm
	运输尺寸 Transportation Dimension (L×W×H)	18585×3690×3800 mm
喂料设备 Feeding Equipment	篦条筛箱尺寸 Grizzly Screen Size	3370×1960 mm
	篦条筛箱容积 Hopper Capacity	7.5 m ³
	最大喂料尺寸 Max. Feeding Size	150 mm
	振动电机(选配) Vibration motor(Optional)	15 Kw
	皮带宽度 Conveyor Width	1000 mm
给料皮带机 Feeding Conveyor	类型 Type	皮带式 Belt Conveyor
	宽度 Width	1000 mm
振动筛箱 Vibrating Screen Box	筛网层数 Number of deck(s)	3
	筛体尺寸 Screen Size	1530×6100 mm
粗料皮带机 Coarse Material Conveyor	卸料高度 Discharge Height	4786 mm
	宽度 Width	500 mm
中料皮带机1(2) Medium Material Conveyor 1(2)	卸料高度 Discharge Height	4940 (4474) mm
	宽度 Width	650 (650) mm
粉料皮带机 Fines Conveyor	卸料高度 Discharge Height	4115 mm
	宽度 Width	1200 mm
行走系统 Travel System	行走控制方式 Travel Control Mode	液压 Hydraulic
	最大爬坡角度 Max. Climbing Angle	20°
其他配置 Other Configurations	喷淋系统 Sprinkling System	照明系统 Lighting System
	集中润滑系统 Centralized Lubrication System	远程遥控系统 Remote Control System
	智能控制系统 Intelligent Control System	

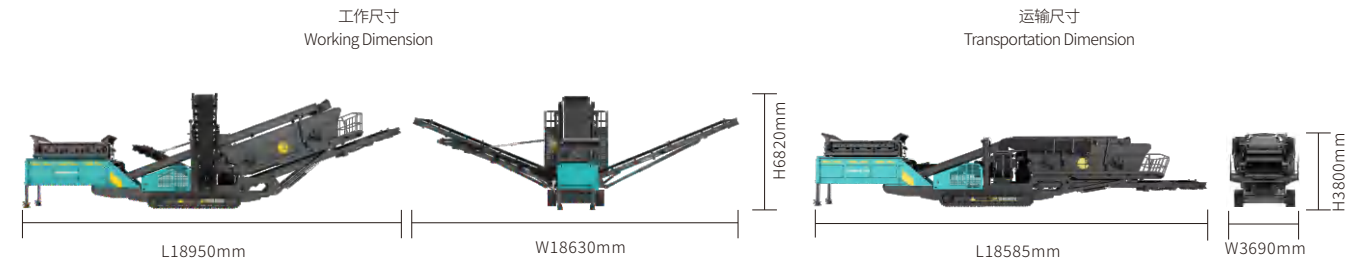

根据公司不断改进产品的方针, 我们保留在未事先通知用户的情况下, 改变参数和设计的权力, 文中插图并不是设备的标准款式, 山河普石勒保留最终解释权。
The parameters and design could be modified according to our upgrading plan. The illustration is not indicating the standard equipment. All rights reserved by Sunward·PSR.

