

SP300CE 履带式圆锥破碎站

CRAWLER CONE CRUSHING PLANT



产品特点 Product Advantages

- ◆ 破碎主机采用阿特拉斯技术的大锥角、大冲程设计，所得成品粒形好，细料占比高，非常适合矿山细碎作业。
The multi-cylinder cone crusher adopts Atlas technology with large cone angle and large stroke design, the finished product has good particle shape and high proportion of fine material, which is very suitable for fine crushing operation in mining industry.
- ◆ 智能、自动化电气控制系统，包含自我诊断、安全互锁、自动报警，保障设备安全可靠。
The intelligent electrical control system has functions such as self-diagnosis, safety interlocking and automatic alarms, ensuring the safety and reliability of the equipment.
- ◆ 给料位置无级调节，主机破碎效率和稳定性更有保证。
Stepless adjustment of feeding position ensures stable crushing efficiency and machine reliability.
- ◆ 集成式变频系统，充分考虑防尘、散热、隔振、防水，电路系统万无一失。
Integrated variable frequency system has multiple functions, including dust-proof, cooling, shock isolation and water-proof, ensuring the safe of electrical system in all aspects.
- ◆ 智能多缸破碎主机，液压调节排料口、自动清腔、过载保护。
Intelligent multi-cylinder cone crusher with hydraulic adjustment of C.S.S., automatic cavity cleaning and overload protection functions.
- ◆ 破碎主机配备独立液压、润滑模块，高效、节能。
The crusher is equipped with independent hydraulic and lubrication modules, highly-efficient and energy-saving.


SP300CE 履带式圆锥破碎站
CRAWLER CONE CRUSHING PLANT



扫一扫视频号获取更多资讯

项目 Item	名称 Description	参数 Parameter
整机 Overall Unit	工作总功率 Total Working Power	327 kW
	整机重量 Total Weight	61 t
	动力方式 Drive Mode	外接电源 Electric
	处理能力 Processing Capacity	210-430 t/h
	工作尺寸 Working Dimension (L×W×H)	19500×4050×5085 mm
	运输尺寸 Transportation Dimension(L×W×H)	20200×3665×3900 mm
喂料设备 Feeding Equipment	喂料高度 Feeding Height	3000 mm
	料斗容积 Hopper Capacity	5 m³
	最大喂料尺寸 Max. Feeding Size	210 mm
破碎主机 Crusher	进料口尺寸(长×宽) Inlet Opening Size(L×W)	——
	排料口调节范围 C.S.S. Range	22-51 mm
	破碎机重量 Crusher Weight	18.7 t
主输送皮带机 Main Conveyor	卸料高度 Discharge Height	3560 mm
	宽度 Width	1200 mm
振动筛箱 Vibrating Screen Box	筛网层数 Number of deck(s)	1(2)
	筛体尺寸 Screen Size	4500×1500 mm
返料皮带机 Return Conveyor	卸料高度 Discharge Height	4966 mm
	宽度 Width	500 mm
成品皮带机 Product Conveyor	卸料高度 Discharge Height	3563 mm
	宽度 Width	1000 mm
侧料皮带机○ Side Conveyor	卸料高度 Discharge Height	2855 mm
	宽度 Width	650 mm
行走系统 Travel System	行走控制方式 Travel Control Mode	液压 Hydraulic
	最大爬坡角度 Max. Climbing Angle	20°
除铁器 Magnetic Separator	除铁器配置 Configuration	永磁 Permanent Magnet
其他配置 Other Configurations	喷淋系统○ Sprinkling System	照明系统 Lighting System
	集中润滑系统 Centralized Lubrication System	远程遥控系统 Remote Control System
	智能控制系统 Intelligent Control System	集成式变频器 Integrated frequency converter

*根据客户工况需求,带○标记为选配;该款设备在选择侧料皮带机时,振动筛箱筛网层数为2层。
*According to customer's working condition,○ is optional ;The deck of screen is 2 if the side conveyor is selected.

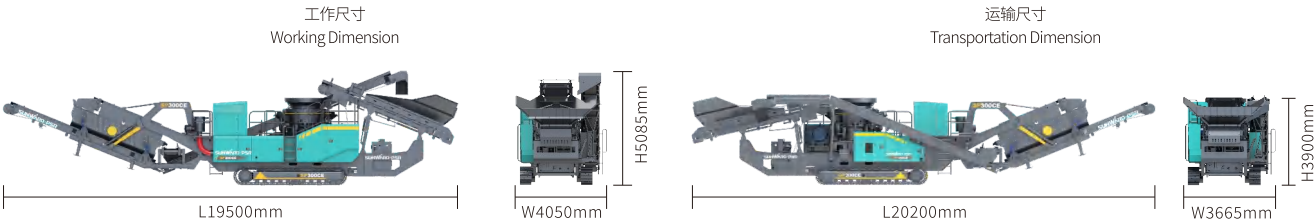

根据公司不断改进产品的方针,我们保留在未事先通知用户的情况下,改变参数和设计的权力,文中插图并不是设备的标准款式,山河普石勒保留最终解释权。
The parameters and design could be modified according to our upgrading plan. The illustration is not indicating the standard equipment. All rights reserved by Sunward•PSR.

