

SP300CTD

履带式圆锥破碎站(柴电两用)

CRAWLER CONE CRUSHING PLANT (DIESEL-ELECTRIC)



产品特点 Product Advantages

- ◆ 外接电、自主发电两种动力方式，节能、便捷。

Two power modes, can be driven by external power supply or integrated generator set, energy-saving and convenient.

- ◆ 破碎主机采用阿特拉斯技术的大锥角、大冲程设计，所得成品粒形好，细料占比高，非常适合矿山细碎作业。

The multi-cylinder cone crusher adopts Atlas technology with large cone angle and large stroke design, the finished product has good particle shape and high proportion of fine material, which is very suitable for fine crushing operation in mining industry.

- ◆ 智能、自动化电气控制系统，包含自我诊断、安全互锁、自动报警，保障设备安全可靠。

The intelligent electrical control system has functions such as self-diagnosis, safety interlocking and automatic alarms, ensuring the safety and reliability of the equipment.

- ◆ 给料机采用变频系统，速度可调；可配备金属检测仪或永磁除铁器。

The feeder adopts variable frequency system with adjustable feeding speed. Metal detector or magnetic separator is optional.

- ◆ 自主研发的破碎主机集成变频系统，充分考虑防尘、散热、隔振、防水，耐低温。

Integrated variable frequency system has multiple functions, including dust-proof, cooling, shock isolation and water-proof, ensuring the safe of electrical system in all aspects.

- ◆ 破碎主机可选配超声波料位检测器。

The crusher can be equipped with an ultrasonic level detector.

- ◆ 破碎主机配置液压调节排料口、自动清腔、过载保护，高效节能。

The crusher is equipped with hydraulic adjustment of C.S.S., automatic cavity cleaning and overload protection functions.

- ◆ 返料带可旋转结构，切换成为出料带。

The return conveyor can be rotated to perform as a side conveyor.


SP300CTD 履带式圆锥破碎站(柴电两用)
CRAWLER CONE CRUSHING PLANT (DIESEL-ELECTRIC)



扫一扫视频号获取更多资讯

项目 Item	名称 Description		参数 Parameter
整机 Overall Unit	工作总功率	Total Working Power	344 kW
	发电机组功率	Generator Power	440 kW
	整机重量	Total Weight	66 t
	动力方式	Drive Mode	柴-电两用 Diesel-electric
	处理能力	Processing Capacity	210-430 t/h
	工作尺寸	Working Dimension (L×W×H)	19640×8640×4800 mm
	运输尺寸	Transportation Dimension(L×W×H)	20100×3500×3850 mm
喂料设备 Feeding Equipment	喂料高度	Feeding Height	3020 mm
	料斗容积	Hopper Capacity	4 m³
	最大喂料尺寸	Max. Feeding Size	210 mm
破碎主机 Crusher	排料口调节范围	C.S.S. Range	22-51 mm
	破碎机重量	Crusher Weight	18.7 t
主输送皮带机 Main Conveyor	卸料高度	Discharge Height	3500 mm
	宽度	Width	1200 mm
振动筛箱 Vibrating Screen Box	筛网层数	Number of deck(s)	1(2) 层
	筛网尺寸	Screen Size	4000×1500 mm
返料皮带机 Return Conveyor	卸料高度	Discharge Height	4400 mm
	宽度	Width	500 mm
成品皮带机 Product Conveyor	卸料高度	Discharge Height	3420 mm
	宽度	Width	1000 mm
侧料皮带机○ Side Conveyor	卸料高度	Discharge Height	2880 mm
	宽度	Width	650 mm
行走系统 Travel System	行走控制方式	Travel Control Mode	液压 Hydraulic
	最大爬坡角度	Max. Climbing Angle	20°
除铁器 Magnetic Separator	除铁器配置	Configuration	永磁 Permanent Magnet
其他配置 Other Configurations	喷淋系统○	Sprinkling System	照明系统 Lighting System
	集中润滑系统	Centralized Lubrication System	远程遥控系统 Remote Control System
	智能控制系统	Intelligent Control System	集成式变频器 Integrated frequency converter

*根据客户工况需求,带○标记为选配;该款设备在选择侧料皮带机时,振动筛箱筛网层数为2层。
*According to customer's working condition, ○ is optional ;The deck of screen is 2 if the side conveyor is selected.

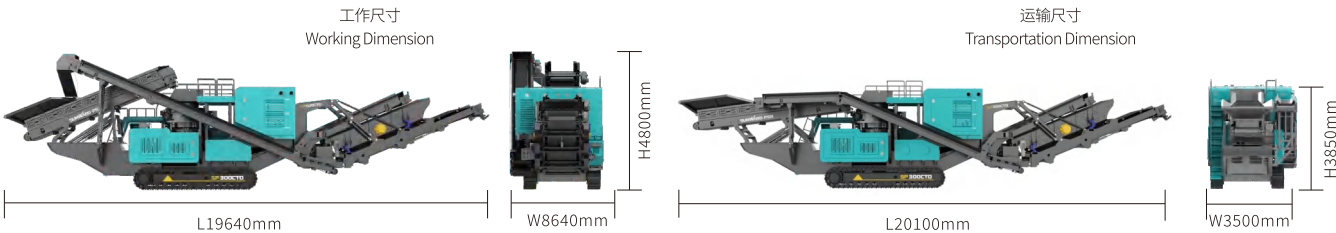

根据公司不断改进产品的方针,我们保留在未事先通知用户的情况下,改变参数和设计的权力,文中插图并不是设备的标准款式,山河普石勒保留最终解释权。
The parameters and design could be modified according to our upgrading plan. The illustration is not indicating the standard equipment. All rights reserved by Sunward·PSR.

